

# Indoor Fine Pixel LED

MW7214-E-BL-U



## Key Features


- Broadcast grey processing gives more image details
- LED module support hot swap & cable less design between LED module and send box
- Superior brightness and color uniformity maintains smooth and complete image quality
- Bezel-free native 1080P, 4K and customized resolution LED video wall system, 1.45mm the pixel distance
- High brightness provides vivid images in a range of lighting conditions
- Superior contrast ratio
- Ultra high refresh rate
- Wide view of field:160°(H)/ 140°(V)
- Low heating and natural heat dissipation mechanism enables fan-less design, no noise
- Support 7\*24 working and lower power consumption
- Long service life
- Maintain from the front of the LED making it ideal for space-constrained installations and eliminating the need for rear access space without power off

## Specifications

Model	MW7214-E-BL-U
<b>LED Module</b>	
Module type	Surface mounted device LED
Pixel pitch	P1.4
Resolution (W×H)	110×124
Dimensions (W×H)	160 mm×180mm
<b>LED Unit</b>	
Dimensions (W×H×D)	640mm×360mm×54.5mm
Modules Component(W×H)	4×2
Resolution(W×H)	440×248
Weight(Kg)	6.95
Screen Area	0.2304 m <sup>2</sup>
Pixel Density	473790 pitch/ m <sup>2</sup>
Surface evenness	≤0.1
Material	Die-cast Aluminum
<b>Optical</b>	
Single Pixel Brightness Correction	Support
Single Pixel Color Correction	Support
Brightness(nits)	50 to 800 adjustable
Color Temperature(K)	3000 to 10000 adjustable
Viewing Angle	Horizontal 160°, Vertical 140°
Center distance deviation of LED	≤2.5%
Brightness uniformity	≥97%
Color uniformity	≤ ± 0.003 Cx, Cy
Contrast	≥4000:1
<b>Processing Performance</b>	
Grey Level	14 bit
Driving Mode	Constant current driving, 1/31 scan
Frame Frequency	50/60 Hz
Refresh Rate	1920 Hz
<b>Electrical</b>	
Power Supply	100 to 240 V AC
Max Consumption	600 W/ m <sup>2</sup>
Average consumption	217 W/ m <sup>2</sup>
<b>General</b>	
Maintenance Mode	Front Maintenance
Ingress protection	IP5X

Operation Temperature	-10°C ~ 40 °C
Operating Humidity	8%~85% (No Condensation)
Storage Temperature	-10°C ~ 55°C
Storage Humidity	10%~90% (No Condensation)
Working Hours	≥100,000

## Dimensions

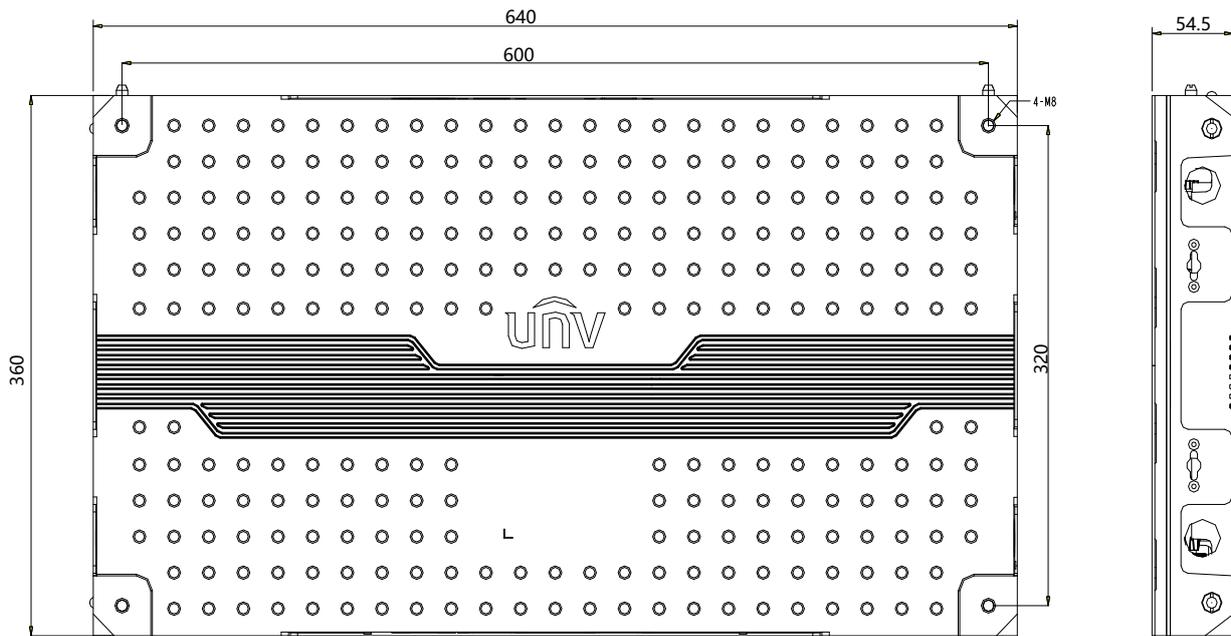

### Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.