

32" LED FHD Monitor

MW3232-V



Key Features

- True color display
- Resolution is up to at 1920×1080
- Wide viewing angle:178°(H)/ 178°(V)
- Specific menu design, which is simple to operate
- Support 7*24 working and lower power consumption
- Adaptively recognize signal
- VESA stand bracket
- Support multiply language
- Built-in 3D COMB filter and 3D Noise Reduction
- 8ms response time for no motion blur, judder or ghosting
- High fidelity digital processing for a brilliant and vivid video
- Professional thermal design to extend equipment lifespan
- Featured button can operate menu and set element geometrical

Specifications



Model	MW3232-V
Display	
Display Type	LED Backlight
Screen Size	31.55"
Aspect Ratio	16:9
Pixel Pitch(mm)	0.121×0.364
Max Resolution	1920×1080
Brightness	300 cd/m ²
Contrast	1200:1
Response Time	8ms
Color	16.7M
Viewing Angle	Horizontal 178°, Vertical 178°
Refresh Rate	60Hz
Interface	
Input	VGA ×1, HDMI×1, DVI×1
Audio	
Audio Input	1, 3.5 mm mini-jack
Audio Output	1, Earphone out
Speaker	2x5W
OSD	
Multi- Language	8 (English, French, German, Simplified Chinese, Korean, Japanese, Espanola, Russian)
Mounting	
VESA	100mm x 100mm
Wall-mounted Thread	4-M4 Threaded hole
General	
Power supply	AC 100~240V, 50/60Hz
Consumption	<45 W(on) <0.5 W(Standby)
Operation Temperature	0°C ~ 40 °C (32°F~104°F)
Operating Humidity	20%~85% (No Condensation)
Storage Temperature	-10°C ~50°C (14°F~122°F)
Storage Humidity	10%~90% (No Condensation)
Dimension (W×H×D)	725.2mm × 425.8mm × 49.5mm(28.55"×16.76"×1.95")
Package(W×H×D)	895mm × 525mm × 125mm(35.24"×20.67"×4.92")
Weight	Net Weight:6.3Kg(13.89lb) Gross Weight:8.0Kg(17.64lb)
Accessory	
Standard	HDMI cable, power cable,Quick Guide

Optional


Hanging bracket(Model: HB-4022-E), Pedestal(Model: HB-5032-C)

Appearance

Dimensions

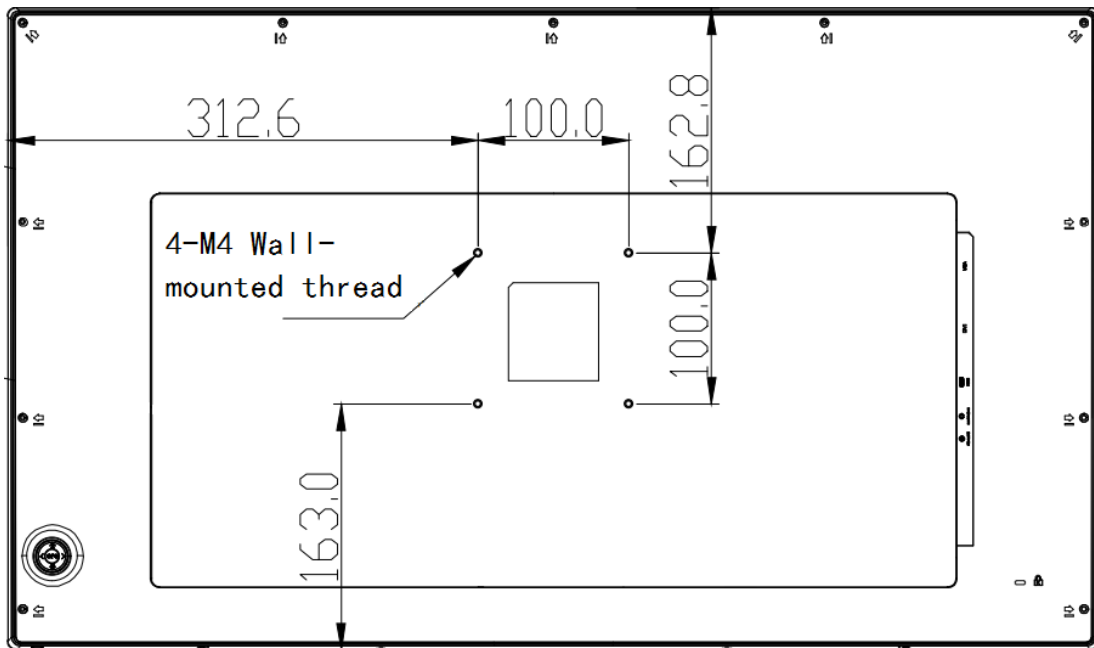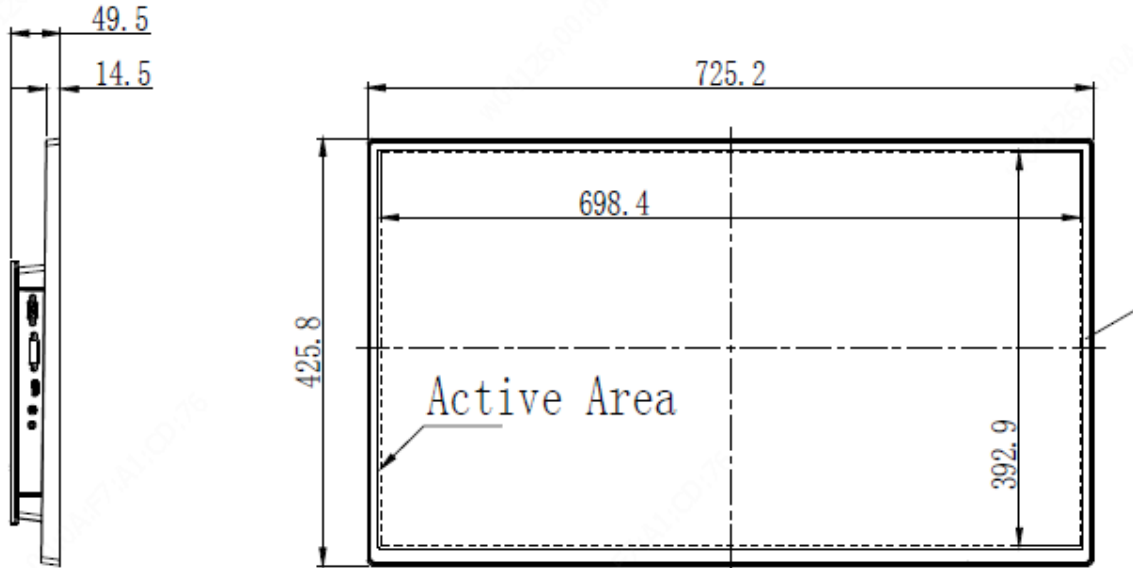

Interfaces

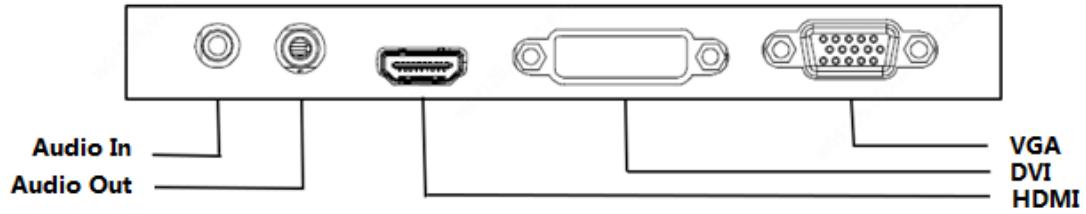

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2017 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.