

XVR-216-Q



Key Features

- Support TVI,AHD, CVI,CVBS, IP cameras with adaptive access
- 16-channel BNC input
- Up to 8MP resolution for recording
- Support 1-ch HDMI output at up to 4K, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coax cable


Specifications

Model	XVR-216-Q
Video/Audio Input	
Analog Video Input	16-ch, BNC
IP Video Input	8-ch(only IP up to 24ch), each channel up to 4K
Supported Analog Camera Types	<p>Support AHD input: 8MP@15fps(channel1-channel4) 5MP@20fps 4MP@30fps 3MP@30fps (channel1-channel4) 1080P@30fps 720P@60fps</p> <p>Support TVI input: 8MP@15fps(channel1-channel4) 5MP@20fps 4MP@30fps 3MP@20fps (channel1-channel4) 1080P@30fps 720P@60fps</p> <p>Support CVI input: 8MP@15fps(channel1-channel4)</p>


	4MP@30fps 1080P@30fps 720P@60fps Support CVBS input
Audio Input	1-ch, RCA
Two-way Audio	1-ch, RCA
Channel Associated Audio	1-ch, RCA
Network	
Incoming Bandwidth	72Mbps
Outgoing Bandwidth	80Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
CVBS Output	1-ch, BNC
VGA Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	1920x1080/60Hz, 1920x1080/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Audio Output	1-ch, RCA
Synchronous Playback	16-ch
Encoding	
Recording Frame Rate	Main stream: 8MP Lite@8fps(channel1-channel4) 5MP Lite@12fps 4MP Lite@15fps 3MP@15fps(channel1-channel4) 2MP@15fps 720P@30fps Sub stream: D1@30fps(Max)
Recording Resolution	8MP Lite/5MP Lite/4MP Lite /3MP/1080P/960P/720P/960H/4CIF/CIF
Hard Disk	
SATA	2 SATA interfaces
Capacity	up to 6TB for each HDD
External Interface	
Network Interface	1RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0,Front panel: 1xUSB2.0
Serial Interface	1 x RS485
General	
Power Supply	12V DC Power Consumption: ≤ 12 W(without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)

Dimensions(WxDxH)	380mm ×315mm× 53mm (15" × 12.4"×2.1")
Weight (without HDD)	≤1.9 Kg (4.19lb)

Dimensions

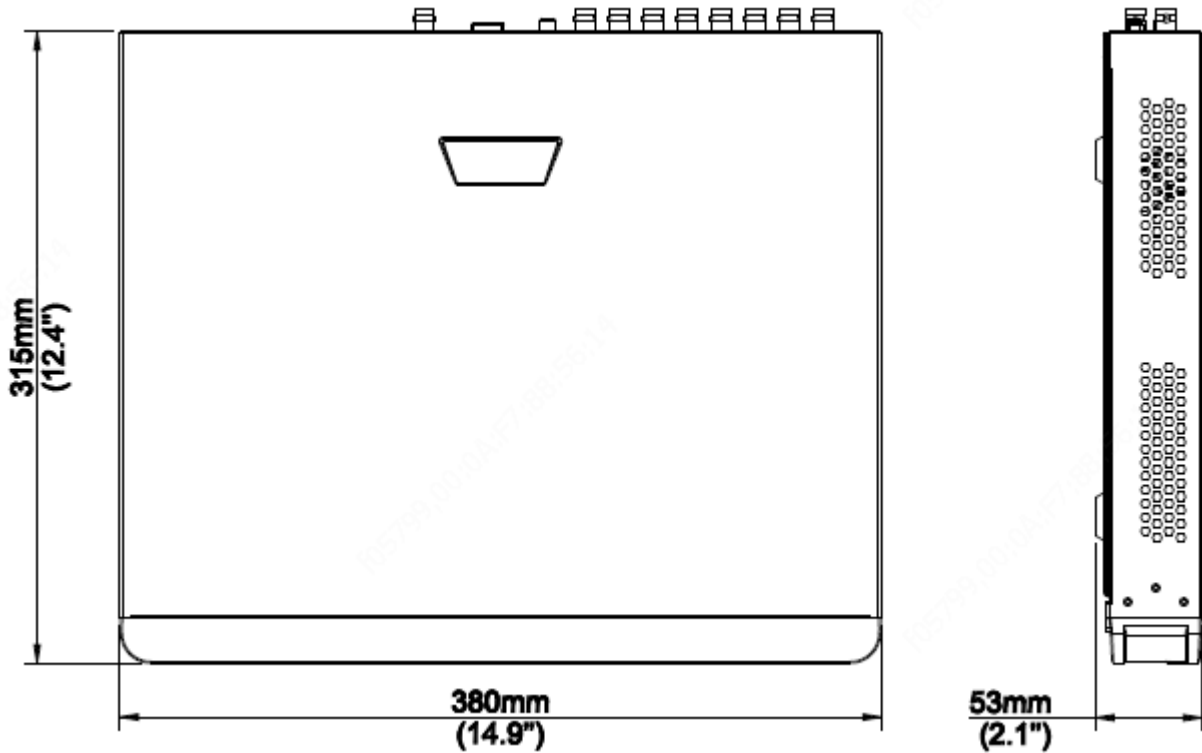

Rear Panel

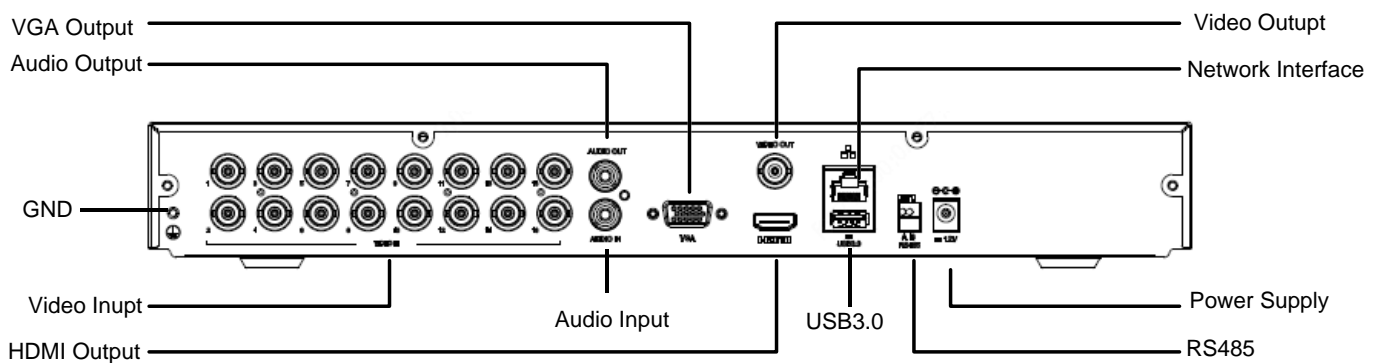

www.uniview.com/uniarch

©2019 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

