

NVR-110B2



Key Features


- Support Ultra 265/H.265/H.264 video formats
- 10-channel input
- Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- Support 1-ch HDMI, 1-ch VGA
- HDMI and VGA simultaneous output
- Up to 5MP resolution recording
- 1 SATA HDD, up to 6TB
- Support cloud upgrade

Specifications


Model	NVR-110B2
Video/Audio Input	
IP Video Input	10-ch
Network	
Incoming Bandwidth	40Mbps
Outgoing Bandwidth	40Mbps
Remote Users	128
Protocols	P2P, UPnP, DHCP
Video/Audio Output	
HDMI/VGA Output	HDMI: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz VGA: 1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
Recording Resolution	5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF/QCIF
Synchronous Playback	10-ch

Corridor Mode Screen	3/4
Decoding	
Decoding format	Ultra 265/H.265/H.264
Liveview/Playback	5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF/QCIF
Capability	1 x 5MP@30, 1 x 4MP@30, 1 x 3MP@30, 2 x 1080p@30, 4 x 720p@30, 10 x D1@30
Hard Disk	
SATA	1 SATA interface
Capacity	up to 6TB for each disk
External Interface	
Network Interface	1 RJ45 10M/100M self-adaptive Ethernet Interface
USB Interface	Rear panel: 2 x USB2.0
General	
Power Supply	12V DC Power Consumption: ≤3 W (without HDD)
Working Environment	-10°C ~ + 55°C (+14°F ~ +131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions (W×D×H)	255mm × 215mm × 42mm (10.0" × 8.5" × 1.7")
Weight (without HDD)	≤1.2kg (2.64lb)

Dimensions

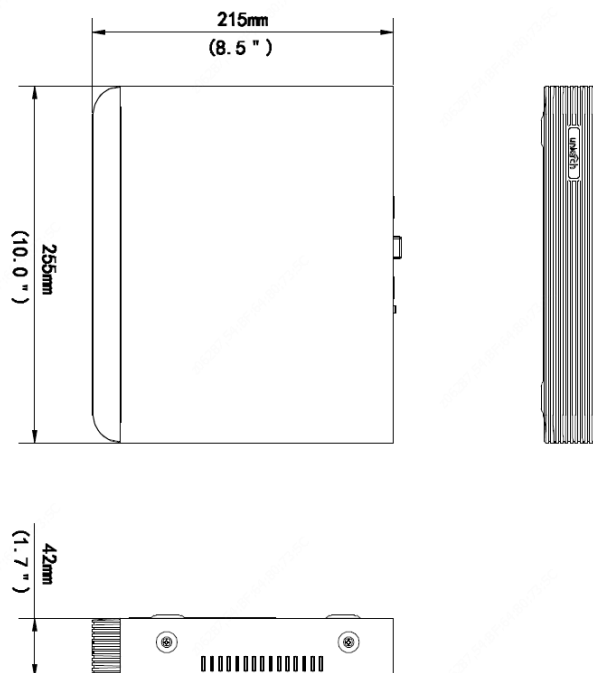

Rear Panel

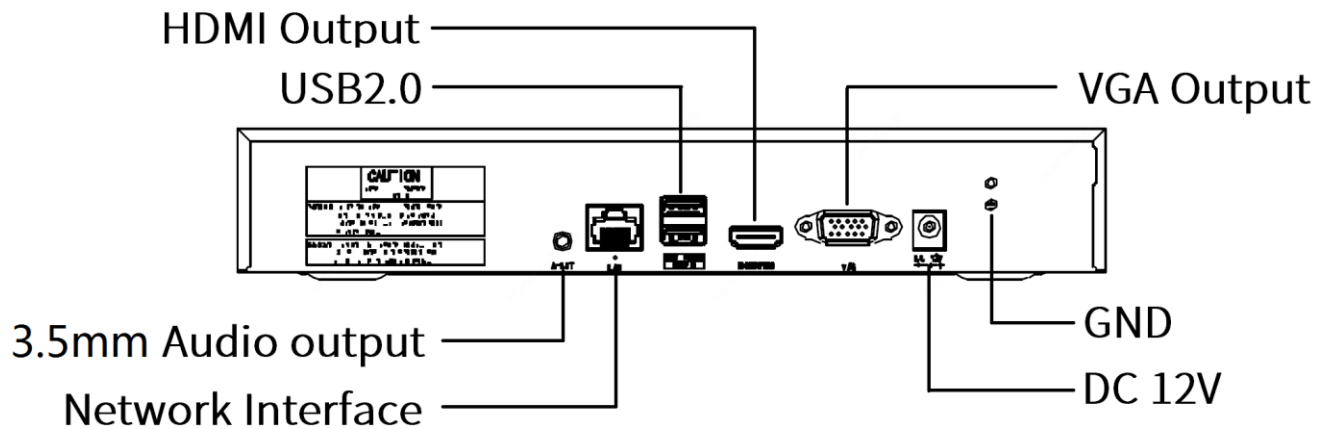

www.uniview.com/uniarch

©2020 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.