


32'' LED FHD Monitor

MW3232-V-K

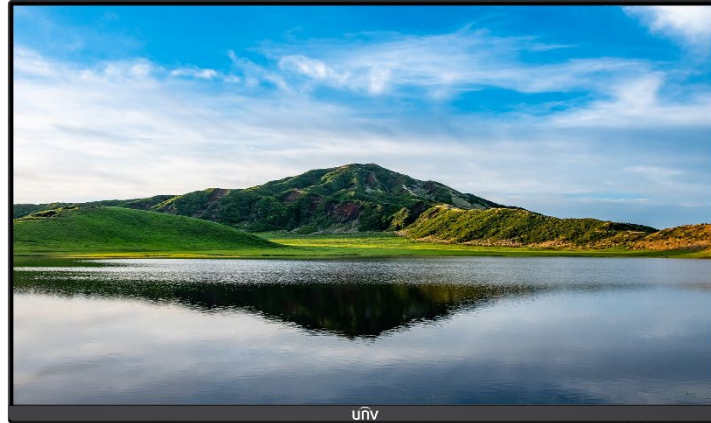

Key Features

- Plastic casing, even lighter.
- Shield design effectively prevents electromagnetic radiation.
- New color management module delivers true-to-life colors.
- Ultra-narrow bezel, ultra-slim depth, light-weight and elegant.
- Wide 178° viewing angles allow viewing from almost any direction.
- Automatic detection of signal cable connection.
- Stable structural design, highly durable.
- Industrial-grade power module ensures stable and reliable operation, low power consumption, and long lifetime.
- Easy pedestal assembly/disassembly. Flexible wall mount and pedestal mount, saving space.


Specifications

| | |
|------------------|-----------------------|
| Model | MW3232-V-K |
| Panel | |
| Panel type | LED backlight |
| Panel size | 31.5 inches |
| Pixel pitch (mm) | 0.363 (H) × 0.363 (V) |
| Resolution | 1920 × 1080 |


| | |
|---------------------------------|---|
| Brightness (cd/m ²) | 250 |
| Contrast ratio | 1200:1 |
| Response time (ms) | 6.5 |
| Color support | 16.7M |
| Viewing angle (H/V) | 178°/178° |
| Active display size (mm) | 698.4 (H) × 392.85 (V) |
| Interface | |
| Input | HDMI × 1, VGA × 1, Audio × 1 |
| Speaker | |
| Speaker | 2 × 2W |
| OSD | |
| Language | Polish; Finnish; Swedish; Dutch; Italian; German; Portuguese; Spanish; French; English; Japanese; Simplified Chinese; Traditional Chinese; Korean; Russian; Czech |
| VESA | |
| Wall mount hole (mm) | 100 × 100 |
| Wall mount screw | 4-M3 screw holes, 4.5mm deep |
| General | |
| Power supply | AC 100 to 240V, 50/60Hz |
| Typical power consumption (W) | ≤ 31.53 |
| Standby power consumption (W) | < 0.5 |
| Operating temperature | 0°C to 50°C |
| Operating humidity | 10% to 85% RH, non-condensing |
| Storage temperature | -20°C to 60°C |
| Storage humidity | 10% to 90% RH, non-condensing |
| Product dimensions (W×H×D)(mm) | 715 × 425 × 44 |
| Package dimensions (W×H×D)(mm) | 793 × 517 × 180 |
| Weight (kg) | Net weight: 6.91 Gross weight: 8.4 |
| Accessories | HDMI cable × 1, Power cable × 1, Adapter × 1, Quick guide × 1 |
| Optional | Pedestal HB-5032-H, Wall mount HB-4022-E |
| *Note | *The specifications listed above may vary with device model |

Appearance

Dimensions

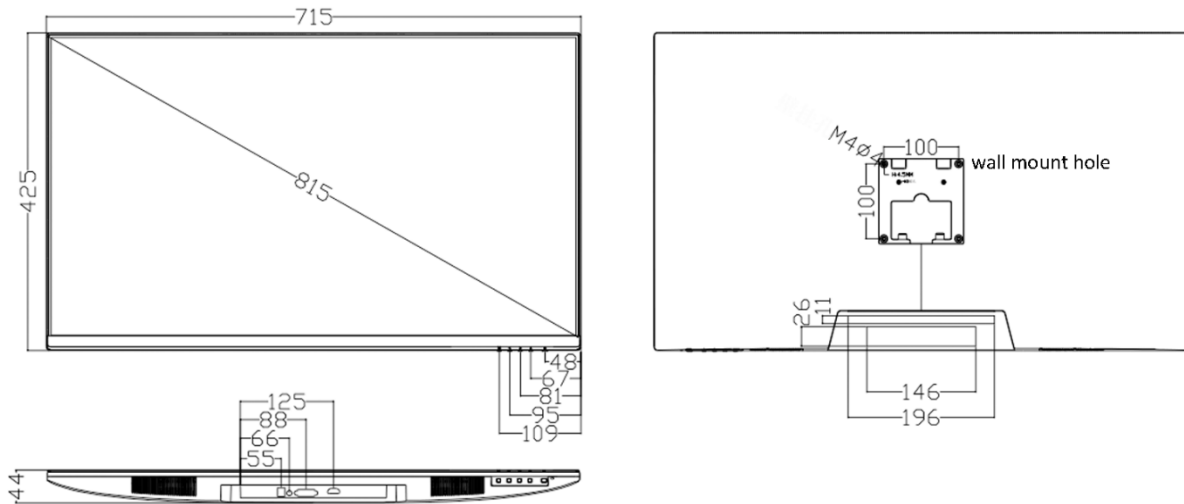

Interfaces

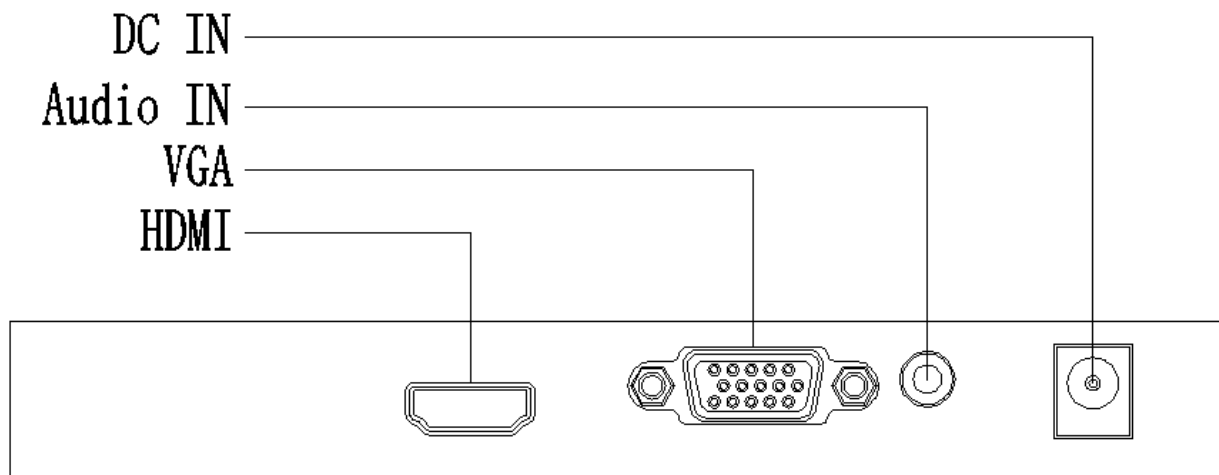

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2021 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.