

Network Video Recorder

NVR508-E-R Series



Features

- Support Ultra 265/H.265/H.264 video formats
- 32/64/128-channel input
- Support mainstream cameras of ONVIF conformance(Profile S, Profile G, Profile T) and RTSP protocols
- Support 2 HDMI and 2 VGA. VGA1 and HDMI1 simultaneous output, VGA2 and HDMI2 simultaneous output. VGA1/HDMI1 and VGA2/HDMI2 independent output
- Up to 32 Megapixels resolution recording
- 8 SATA HDDs, up to 16TB for each HDD
- Support N+1 Hot spare
- Support HDD hot swap with RAID 0, 1, 5, 6, 10 storage scheme configurable
- Redundant power supply optional
- ANR technology to enhance the storage reliability when the network is disconnected
- Support cloud upgrade


Specifications

Decoding	Description
Decoding Format	Ultra 265,H.265,H.264
Decoding Capability	NVR508-32E-R:


	2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 16 x 4MP@30, 32 x 1080P@30 NVR508-64E-R: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 16 x 4MP@30, 32 x 1080P@30, 54 x 960P@25, 64 x 720P@30 NVR508-128E-R: 2 x 32MP@30, 4 x 16MP@30, 5 x 12MP@30, 8 x 4K@30, 10 x 6MP@30, 12 x 5MP@30, 16 x 4MP@30, 20 x 3MP@30, 32 x 1080P@30, 54 x 960P@25, 72 x 720P@30, 128 x D1
Audio Compression	G.711A,G.711U
Network	Description
Incoming Bandwidth	384Mbps
Outgoing Bandwidth	384Mbps
Remote Users	128
Protocols	TCP/IP,P2P,UPnP,NTP,DHCP,PPPoE,HTTP,HTTPS,DNS,DDNS,SNMP,SMTP,NFS,RTSP,802.1x,IPV6
Browser(Plugin)	IE(IE10/11)for Windows,Firefox(version 52.0 and above)for Windows,Chrome(version 45 and above)for Windows,Edge(version 79 and above)for Windows
Video/Audio Input	Description
RCA Audio Input	1-ch
Video/Audio Output	Description
HDMI Output	HDMI1,HDMI2:4K(3840x2160)/60Hz,4K(3840x2160)/30Hz,1920x1080/60Hz,1920x1080/50Hz,1600x1200/60Hz,1280x1024/60Hz,1280x720/60Hz,1024x768/60Hz
VGA Output	VGA1,VGA2:1920x1080/60Hz,1920x1080/50Hz,1600x1200/60Hz,1280x1024/60Hz,1280x720/60Hz,1024x768/60Hz
RCA Audio Output	2-ch
Liveview Display	NVR508-32E-R:1/4/6/8/9/16/25/36 NVR508-64E-R: HDMI1/VGA1:1/4/6/8/9/16/25/36/64,HDMI2/VGA2:1/4/6/8/9/16/25/36 NVR508-128E-R: HDMI1/VGA1:1/4/6/8/9/16/25/36/64, HDMI2/VGA2:1/4/6/8/9/16/25/36
Corridor Mode Screen	3/4/5/7/9/10/12/16/32
Two-way Audio	Description
Two-way Audio	1-ch,RCA(Using the audio input and output)
Snapshot	Description
FTP/Schedule/Event Snapshot	16-ch snapshot,up to 1080P resolution
Recording	Description
Recording Resolution	32MP/16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P/D1/2CIF/CIF
Synchronous Playback in Local	16-ch
Smart	Description
VCA Detection by IPC	Vehicle Detection,SIP(Intrusion Detection,Cross Line Detection,Enter Area,Leave Area),Ultra Motion Detection(UMD),Temperature Detection(Fire Detection,Smoking Detection,Temperature Measurement,Smoke and Fire Detection),People Counting(People Flow Counting,Crowd Density Monitoring),Video Metadata,Traffic Monitoring
VCA Search	Motor Vehicle Search,Non-Motor Vehicle Search,General Search,People Counting Report,Heat Map

Smart by IPC	Total 16-ch(Vehicle Detection, Temperature Detection, SIP, UMD, Video Metadata, Traffic Monitoring)
Vehicle Picture Library	Up to 5 vehicle picture libraries, with up to 25,000 vehicle pictures in total
Alarm	Description
General Alarm	Defocus Detection, Scene Change Detection, Object Left Behind, Object Removed, Auto Tracking, Motion Detection, Tampering, Video Loss Alarm Input, Audio Detection
Alert Alarm	IP Conflict, Network Disconnected, Disk Offline, Disk Abnormal, Illegal Access, Hard Disk Space Low, Hard Disk Full, Recording/Snapshot Abnormal
Hard Disk	Description
SATA	8 SATA Interfaces
Capacity	Up to 16TB for each disk
Disk Group	Support
Disk Array Type	RAID 0, 1, 5, 6, 10
External Interface	Description
Network Interface	2 RJ45 10M/100M/1000M self-adaptive Ethernet Interface
USB	Front panel: 2 x USB2.0, Rear panel: 2 x USB3.0
RS485	1
RS232	1
Alarm In	16-ch
Alarm Out	10-ch
eSATA	1
Power Output	12V
Power Supply	AC 100~240V Power Consumption: ≤ 50W (without HDD)
Working Environment	Description
Working Temperature	-10° C ~ + 55° C (+14° F ~ +131° F)
Working Humidity	≤ 90% RH (non-condensing)
Power Consumption (without HDD)	≤ 50W
Dimensions	Description
Weight (without HDD)	≤ 6Kg (13.23lb)
Dimensions	442mm × 448mm × 93mm (17.4" × 17.6" × 3.7")
Certification	Description
Certification	CE, FCC, UL, RoHS, WEEE
CE	EN 55032, EN 61000-3-3, EN IEC 61000-3-2, EN 55035
FCC	Part15 Subpart B

Dimensions

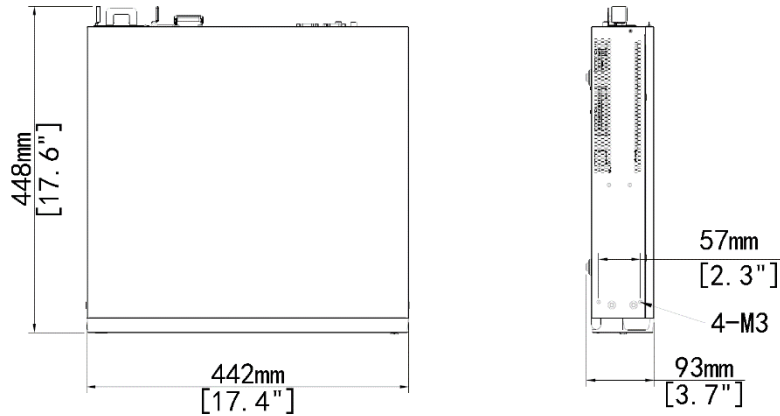

Rear Panel

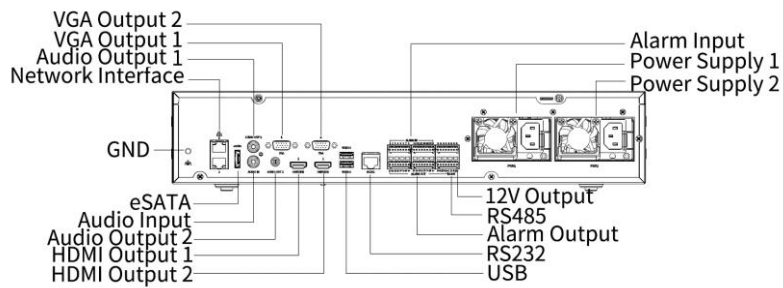

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.